

OC 'T' Range AC TYPE

air blown oil coolers






COOLER SIZE	Cooling at 100°C T Kw	Port Sizes	Air flow M ³ /Min	Acoustic level at 1mtr dBa	Approx Fan Power	AC Motor AMPS			STD IP Rating	Approx weight KG (dry)
						110V	230V	400V		
T0ES	6.00	1" BSP	4.50	55	0.03	0.39	0.12	N/A	44	7
T0EL	8.55	1" BSP	7.12	67	0.05	0.65	0.24	N/A	44	9
T2ES	22.00	1" BSP	15.83	63	0.07	1.06	0.31	0.23	44	13
T3ES	36.00	1" BSP	30.83	62	0.13	N/A	0.63	0.36	44	20
T4ES	39.00	1¼" BSP	28.25	62	0.13	N/A	0.63	0.36	44	25
T5ES	52.00	1¼" BSP	37.50	68	0.37	N/A	1.80	1.40	55	34
T6EQ	67.00	1¼" BSP	45.00	61	0.25	N/A	1.55	0.94	55	52
T6ES	102.00	1¼" BSP	81.67	70	0.55	N/A	3.60	1.75	55	52
T7EQ	76.00	1¼" BSP	50.00	61	0.25	N/A	1.55	0.94	55	57
T7ES	117.00	1¼" BSP	91.67	70	0.55	N/A	3.60	1.75	55	57
T8E	161.00	1½" BSP	104.00	81	1.50	N/A	6.00	4.30	55	92
T9EQ	370.00	3" SAE	350.00	79	4.00	N/A	N/A	8.8	55	210
T9E	395.00	3" SAE	398.00	85	3.00	N/A	N/A	7.2	55	193
T11EQ	490.00	3" SAE	383.00	79	3.00	N/A	N/A	7.2	55	297
T11EW	410.00	3" SAE	278.00	75	2.20	N/A	N/A	6.2	55	297

Fan Powers and amps are for guidance only: Alternative fans may be fitted.
Acoustic levels are measured in 'Free field conditions' and may vary by ± 3Dba.
Increased IP ratings are available on request.

COOLER SIZE	A	B	C	D	E	F	G	H	I	J
T0-E (L)	243	315	170(220)	200	80	15	193	250	63	190
T2-E	352	415	225	200	150	15	302	250	63	300
T3-E	446	515	350	200	200	15	396	250	63	392
T4-E	446	540	380	250	200	20	396	300	94	392
T5-E	461	690	385	250	200	20	411	300	94	540
T6-E	602	790	405	250	310	20	552	300	94	645
T7-E	602	940	405	250	310	20	552	300	94	790
T8-E	725	960	560	250	100	20	645	300	140	790
T9-E	990	1350	750	680	440	40	916	730	94	1050
T11-E	1271	1502	740	680	525	40	1197	730	140	1200

OC 'T' Range AC Type PERFORMANCE CURVES

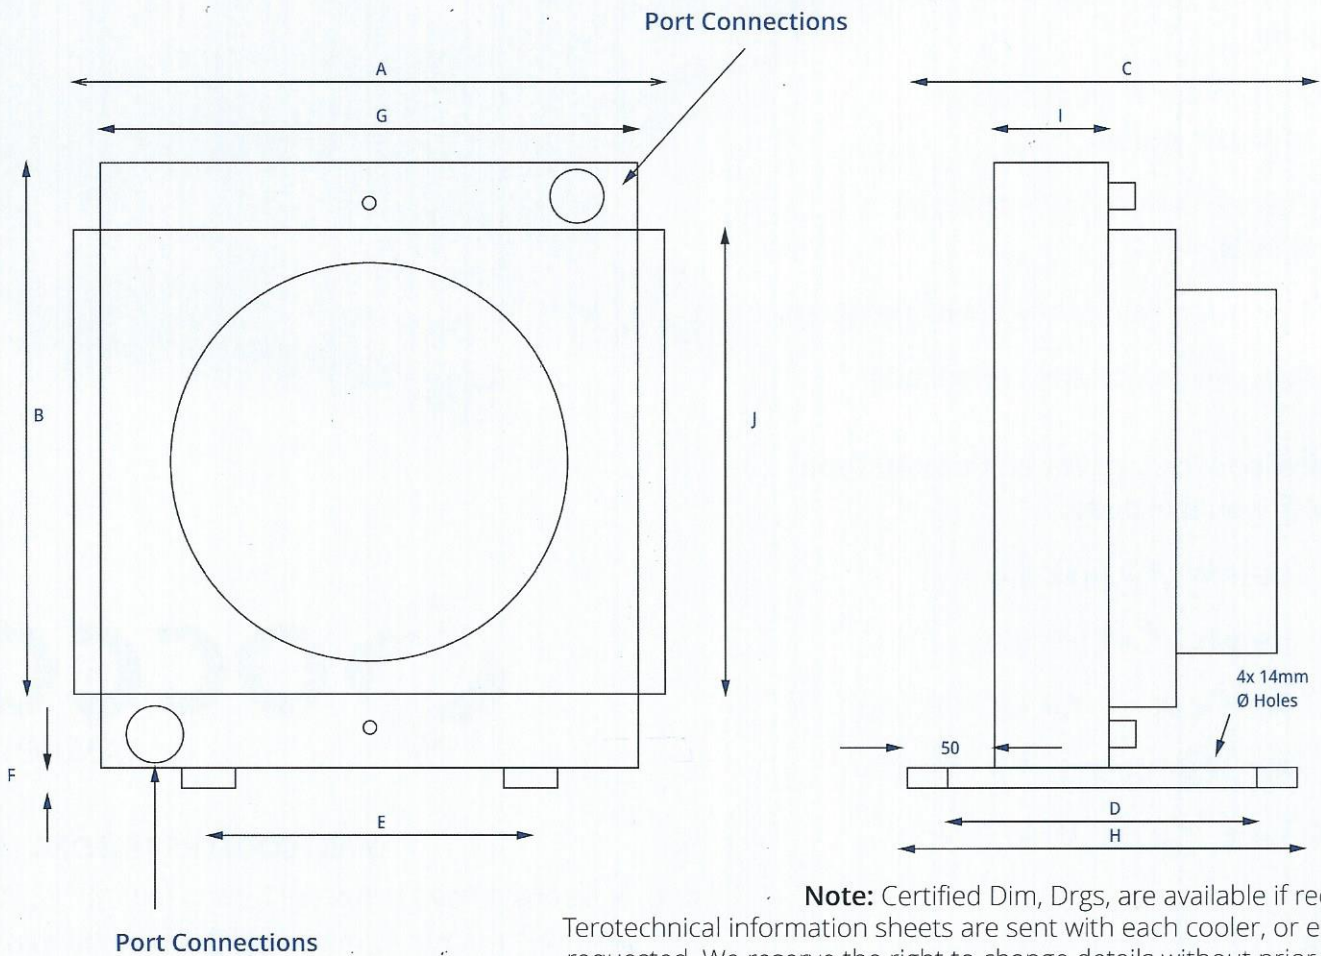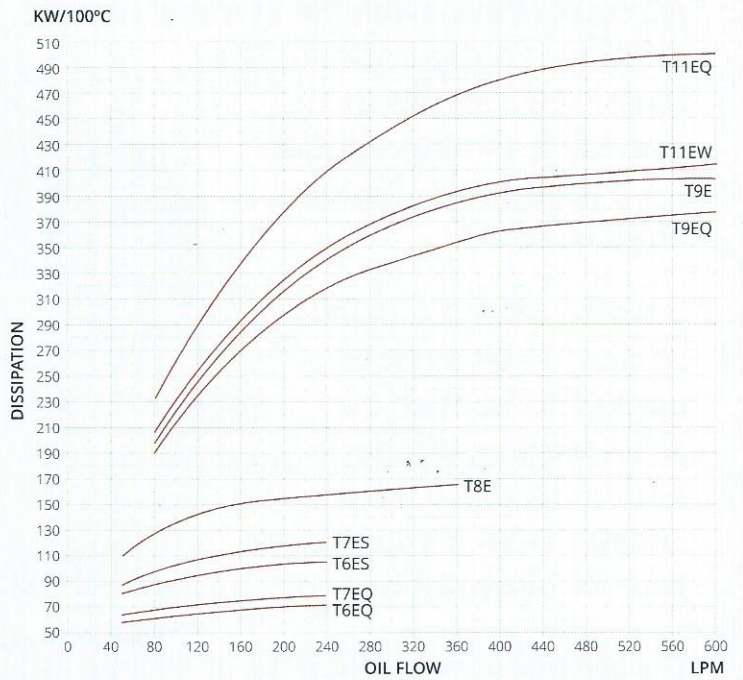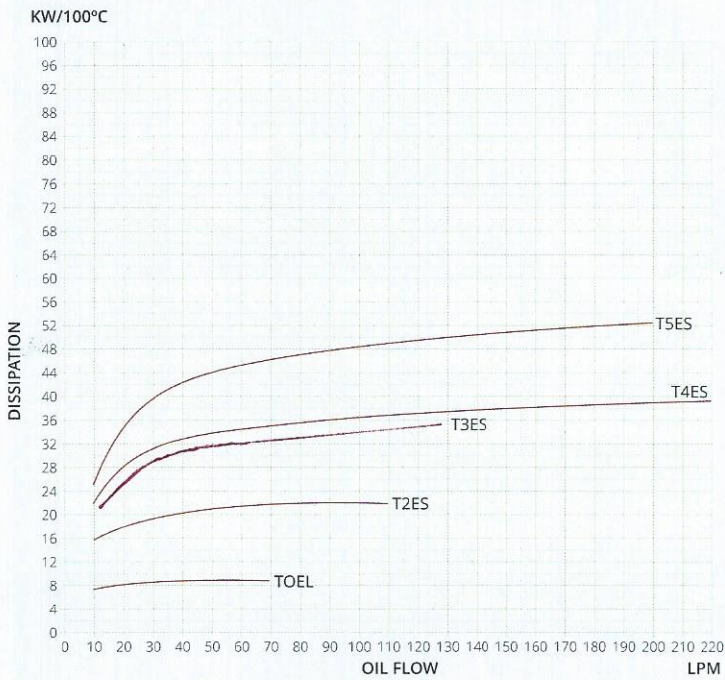

Note: Certified Dim, Drgs, are available if required.

Terotechnical information sheets are sent with each cooler, or earlier if requested. We reserve the right to change details without prior notice.

www.occcoolers.co.uk