

OC 'T' Range DC TYPE



air blown oil coolers




COOLER SIZE	Cooling at 100°C T Kw	Port Sizes	Air flow M ³ /Min APPROX	CURRENT DRAW AMPS		IP Rating	Approx weight KG (dry)
				12V	24V		
T0DC	6.00	1"BSP	4.5	1.9	1.1	67	7
T0DCL	8.00	1"BSP	7.5	6.5	3.4	66	9
T2SDC	20.00	1"BSP	24	11.7	7.8	66	11
T3SDC	40.00	1"BSP	35	17.7	9.7	66	19
T4SDC	45.00	1¼"BSP	35	17.7	9.7	66	25
T5SDC	58.00	1¼"BSP	46	19.4	9.7	66	28
T6SDC	75.00	1¼"BSP	46	19.4	9.7	66	40
T7SDC	82.00	1¼"BSP	46	19.4	9.7	66	50

Amps stated are for guidance only; Alternative fans may be fitted.

OC 'T' Range DC Type PERFORMANCE CURVES

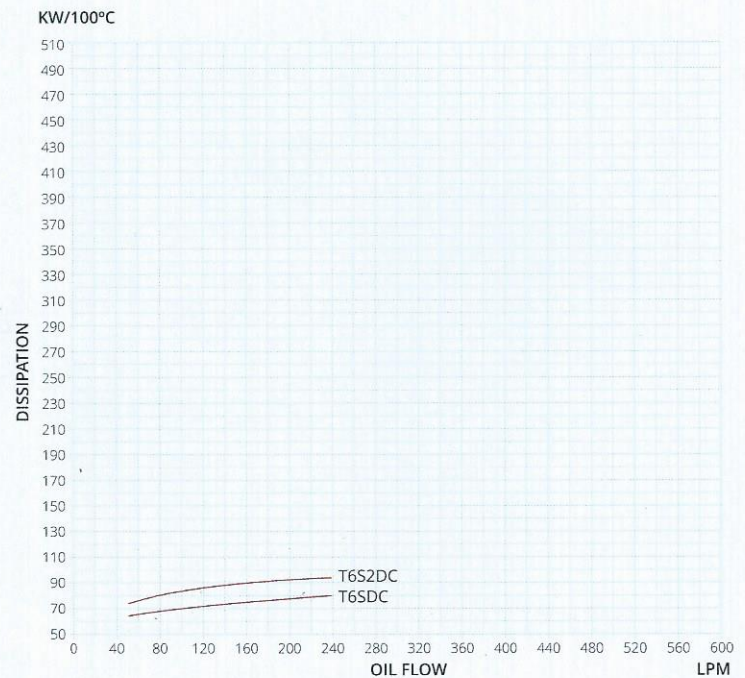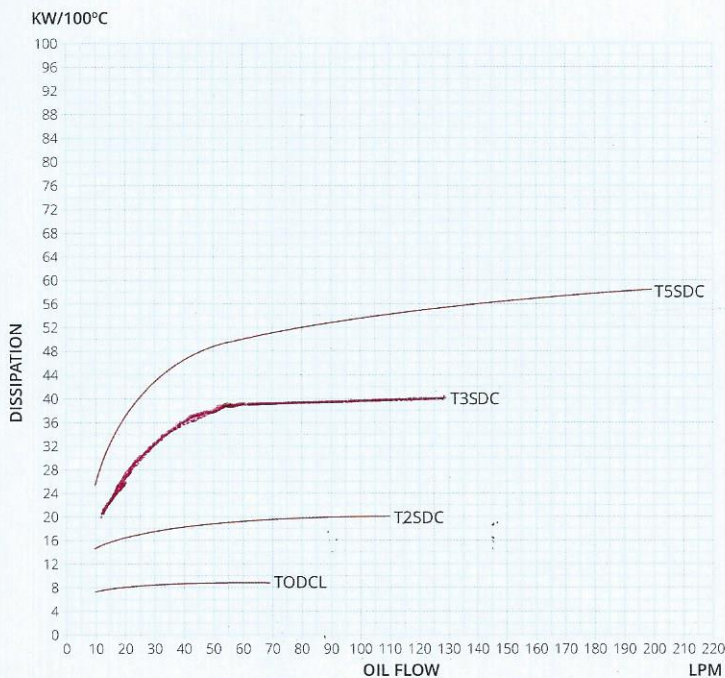

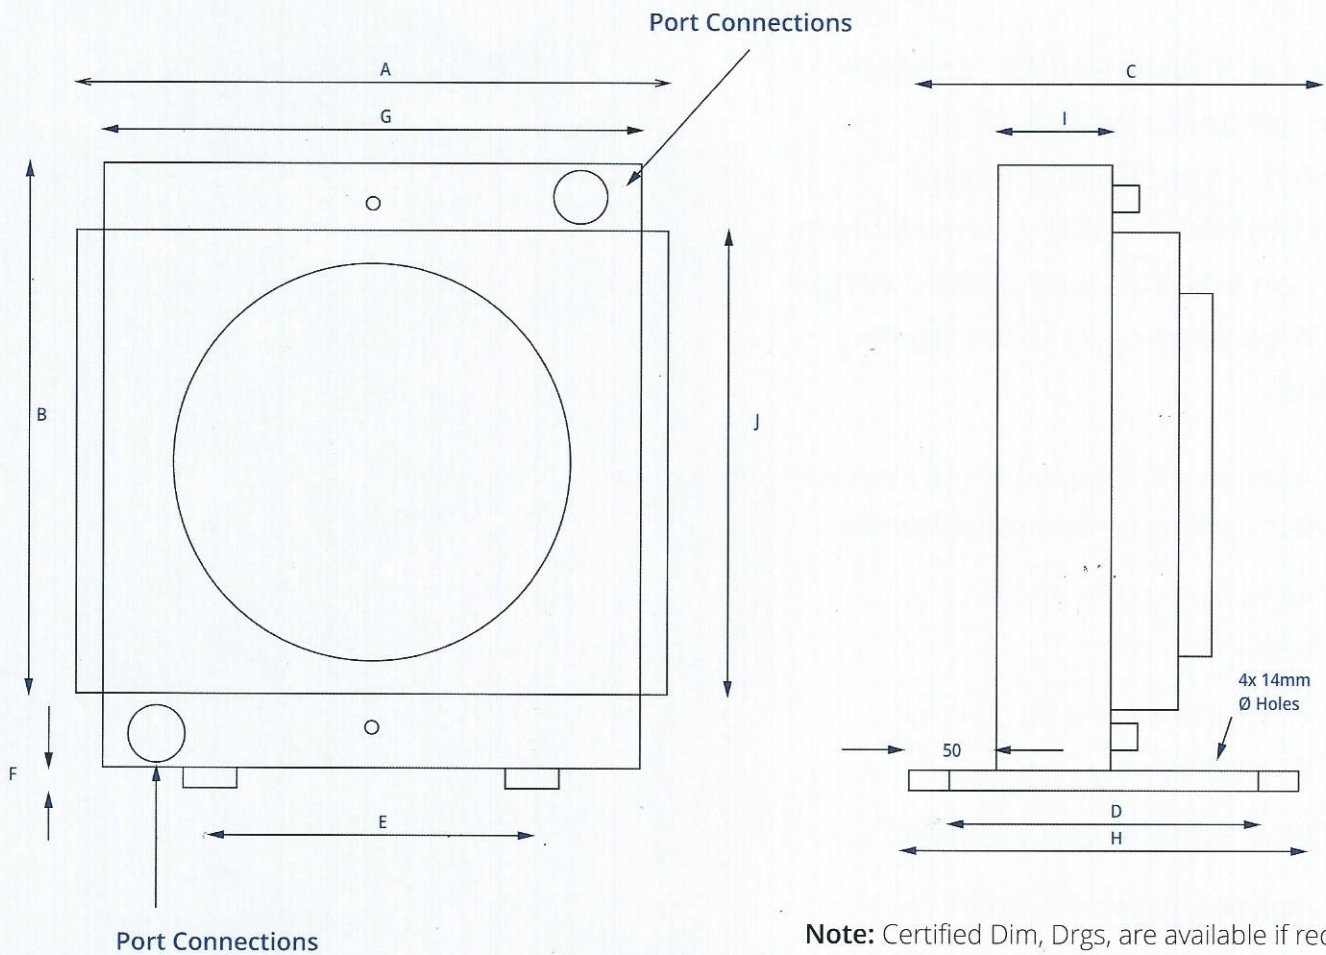

Note: Certified Dim, Drgs, are available if required. Terotechnical information sheets are sent with each cooler, or earlier if requested. We reserve the right to change details without prior notice.

COOLER SIZE	A	B	C	D	E	F	G	H	I	J
T0-DC(L)	243	315	190 (205)	200	80	15	193	250	63	190
T2-DC	352	415	205	200	150	15	302	250	63	300
T3-DC	446	515	240	200	200	15	396	250	63	392
T4-DC	446	540	270	250	200	20	396	300	94	392
T5-DC	461	690	270	250	200	20	411	300	94	540
T6-DC	602	790	270	250	310	20	552	300	94	645
T7-DC	602	940	270	250	310	20	552	300	94	790

www.occcoolers.co.uk